

STANDARD MICRO-D CONNECTORS

RECTANGULAR CONNECTORS

- Pigtail connector - Metal shell 56
- Pigtail connector - Low profile - Metal shell 58
- Pigtail connector - Plastic shell 60
- Solder cup connector - Metal shell 62
- Solder cup connector - Low profile - Metal shell 64
- Solder cup connector - Plastic shell 66

PCB RECTANGULAR CONNECTORS

- PCB connectors overview 68
- CBR (Condensed Board Right Angle) type - 0.100" pitch
Metal shell 70
- CBR (Condensed Board Right Angle) type - 0.100" pitch
Plastic shell 72
PCB layout for CBR type 74
- CBP (Condensed Board Right Angle) type - 0.100" pitch
Low profile - Metal shell 76
- CBP (Condensed Board Right Angle) type - 0.100" pitch
Low profile - Plastic shell 78
PCB layout for CBP type 80
- BR (Board Right Angle) type - 0.100" pitch - Metal shell 82
PCB layout for BR type 84
- BS (Board Straight) type - 0.100" pitch - Metal shell 86
- BS (Board Straight) type - 0.100" pitch - Plastic shell 88
PCB layout for BS type 90
- CBR (Condensed Board Right Angle) type - 0.075" pitch
Metal shell 92
PCB layout for CBR 0.075" type 94
- BS (Board Straight) type - 0.075" pitch - Metal shell 96
- BS (Board Straight) type - 0.075" pitch - Plastic shell 98
PCB layout for BS 0.075" type - MIL standard layout 100
PCB layout for BS 0.075" type - Specific layout 102

CONNECTOR SAVERS


- One piece design - Metal or plastic shell 104
- One piece design - Low profile - Metal shell 105
- Back to back assembly - Metal or plastic shell 106
- Back to back assembly - Low profile - Metal shell 107

MICROSTRIP CONNECTORS

- Pigtail & solder cup assemblies 108
- PCB connector 110
- Microstrip general information 112
PCB layout for microstrip connector - 0.050" pitch 115

CIRCULAR CONNECTORS

- 118

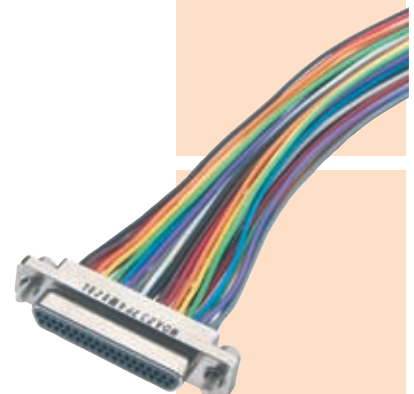

CIRCULAR CONNECTORS

In addition to the classic rectangular micro-D connectors based on the MIL standard, AXON' has also developed a range of metal and plastic circular connectors, based on twist pin technology, with the following characteristics :

▶ Several sizes

5 / 7 / 12 / 19 / 37 / 85 ways, other configurations available on request.

▶ Several versions

▶ METAL

- Metric thread coupling.
- Triple start thread coupling, with anti-decoupling ring.
- Bayonet coupling.
- Breakaway connectors.

▶ PLASTIC

- Solder cup connector.
- Pigtail connector.

▶ CUSTOMER DESIGN ON REQUEST

- Quick disconnect Push Pull coupling.
- Quick disconnect SNAP coupling.



▲ 5 WAY METRIC THREAD CONNECTOR



▲ 19 WAY BAYONET CONNECTOR



▲ 5 WAY ANTIDECOUPLING CONNECTOR



▲ 19 WAY ANTIDECOUPLING CONNECTOR

► BREAKAWAY METAL CIRCULAR CONNECTORS



▲ 19 WAY BREAKAWAY ALUMINIUM CONNECTORS WITH OVERMOULDING

► Several mounting options

- Male and female cable connector.
- Female panel mount receptacle (front or rear mount, square flange or jam nut).
- Rear part for heat-shrink boots or overmouldings available
- Rear funnels for braid groundings by axoclamp® available on both cable and panel mount connectors.

► Material options

- Nickel plated brass.
- Nickel plated aluminium.
- Thermoplastic.
- Other materials available on request.



▲ CUSTOM DESIGN : 12 WAY THREAD COUPLING BRASS CONNECTORS, WITH MATT BLACK FINISH



▲ 85 WAY THREAD COUPLING STAINLESS STEEL CONNECTORS